

INTERACTING BLENDS OF NOVEL ACRYLATED UNSATURATED POLYESTERS BASED ON DGEBC WITH STYRENE MONOMER

Dinesh Patel

Department of Chemistry, Shree P.M.Patel Institute of Post Graduate Studies & Research in Science, Anand-388 001, Gujarat, India
(Affiliated to Sardar Patel University, Vallabh Vidyanagar-388 120, Gujarat, India.)
E-mail: drdineshpatel@rediffmail.com

ABSTRACT

Novel unsaturated polyesters (PEs) was prepared by reaction of epoxy resin of bisphenol-C with various glutaric acids using a base catalyst. The post reactions of all these PEs were carried out with acryloyl chloride. The resultant products are designated as acrylated polyesters (APEs). The PEs and APEs were characterized by elemental analysis, number average molecular weight determined by non-aqueous conductometric titration method. IR spectra of PEs and APEs were also recorded. Blending of these APEs were carried out with styrene monomer. The curing of these APEs-Styrene blends was monitored on a differential scanning calorimeter (DSC) by using benzoyl peroxide as a catalyst. Based on DSC data, the glass fiber reinforced composites of APEs-Styrene blends have been fabricated and their chemical, mechanical and electrical properties have been evaluated. The unreinforced cured samples of APEs-Styrene blends were analyzed thermogravimetrically.

Keywords: Epoxy resin (DGEBC), Polyester, Polyamide, Number average molecular weight ($\overline{M}_n$), Differential scanning calorimeter (DSC), Thermogravimetric analysis (TGA), Interacting blends.

INTRODUCTION

It is well known that epoxy resins, polyesters and polyamides are independent polymer candidate for a wide range of industrial application like composites, adhesive, anticorrosive coatings and others¹⁻⁵. Merging of these two epoxy and ester segments into one polymer chain may yield a polymer with better properties than these of the individual ones.

Hence in extension of an earlier work^{6,7} the present article comprises the study of APEs-Styrene blends. This has been scanned in Scheme-1.

EXPERIMENTAL

Materials

Epoxy resin based on bisphenol-c was prepared according to method reported⁸. Plane weave fibers, in the form of E-glass woven fabric (polyester) compatible) 0.25mm thick (Unnati Chemicals, India) of a real weight 270 g.m⁻² were used for composite fabrication. All other chemicals used were of pure grade.

Synthesis of Bisphthalamic Acids

Various glutaric acids were prepared by method reported in literature⁹.

Synthesis of (PEs) and (APEs)

Both PEs (3a-c) and APEs (4a-c) were prepared by method reported in an earlier communication¹⁰.

Synthesis of APEs-Styrene Blends (5a-c)

These were prepared by method reported in an earlier communication¹¹.

Composite Fabrication

The composites were prepared by using E-type of glass fiber. The glass fiber: resin ratio is 60:40 (30%APEs resin + 10%DGEBC). Suspensions of APEs (4a-c) were prepared in tetrahydrofuran. In the suspension of above polymer 1% of ethylene dimethylacrylate (as a cross linking agent) with 0.05%

benzoyl peroxide (as an initiator) were added and mixed well. The mixture was applied with a brush to a 200mm × 200mm glass cloth and the solvent was allowed to evaporate. The ten dried prepregs prepared in this way were then stacked one on top of another and pressed between steel plates coated with a “Teflon” film release sheet and compressed under 70 psi pressure. The prepregs stacks were cured by heating it in an autoclave oven at 220°C for about 6 hour. The composites so obtained were cooled to 45-50°C before the pressure was released. The composites were then machined to final dimensions.

Measurements

Elemental Analysis

The C, H, N and S content of all the PEs (3a-c) and APEs (4a-c) were estimated by means of Thermofinagan 1101 flash elemental analyzer (Italy). The number average molecular weight of all the PEs and APEs were estimated by non-aqueous conductometric titration following method reported in an earlier communication ¹⁰. The IR spectra were recorded in Kerr pellets on a Nicolet 760 D spectrometer for both PEs and APEs. Number of hydroxyl groups present per repeating unit in PEs (3a-c) was analyzed by employing acetylating method reported in an earlier communication ¹⁰. Also, APEs (4a-c) were characterized for the presence of double bonds per repeating unit employing mercury-catalyzed bromate-bromide method reported in an earlier communication ¹⁰. All the results for number of –OH group for PEs and presence of double bonds for APEs are found to be consistent with the predicted structures and the results are furnished in Table-1 and 2 respectively.

Curing

Curing of all these APEs-Styrene blends (5a-c) were carried out on a differential scanning calorimeter (DSC) by using benzoyl peroxide as a catalyst. A Du-Pont 900 DSC was used for this study. The instrument was calibrated using standard indium metal with known heat of fusion ($\Delta H=28.45\text{J/g}$). Curing was carried out from 30-300°C at 10°C min⁻¹ heating rate. The sample weight used for this investigation was in the range of 4-5 mg along with an empty reference cell. The results are furnished in Table-3.

Unreinforced cured samples of APEs-Styrene blends (5a-c) were subjected to thermogravimetric analysis (TGA) on Du-Pont 950 thermo gravimetric analyzer in air at a heating rate of 10°C min⁻¹. The sample weight used for this investigation was in the range of 4-5 mg. The results are furnished in Table-4.

Characterization of composite samples

All the chemical, mechanical and electrical tests on composites were conducted according to ASTM methods (as listed below) using three specimens for each test.

Chemical Resistance Test

The resistances against chemicals of the composite samples were measured according to ASTM D 543. The chemicals used for the study were H₂SO₄ (25%v/v), HCl (25%v/v), NaOH (25%w/v), ethanol, acetone, DMF and THF. The tests were performed by dipping the composite samples in 100ml each of the reagents for 7 days at room temperature. After 7 days the specimens were taken out from the reagents and after drying they were examined for the percentage changes in thickness and weight. The results are furnished in Table 5.

Mechanical and Electrical Testing

- (1) The Flexural strength was measured according to ASTM D 790.
- (2) The Compressive strength was measured according to ASTM D 695.
- (3) The Impact strength was measured according to ASTM D 256.
- (4) The Rockwell hardness was measured according to ASTM D 785.
- (5) The Electrical strength was measured according to ASTM D 149.

The results are furnished in Table-6. All mechanical and electrical tests were performed using three specimens and their average results were considered.

RESULTS AND DISCUSSION

Novel polyesters (PEs) was prepared by reaction of epoxy resin of bisphenol-C with bisphthalamic acids using a base catalyst. The post reactions of all these PEs were carried out with acryloyl chloride. The resultant products are designated as acrylated polyesters (APEs). Both PEs and APEs were prepared by

method reported in an earlier communication¹⁰. The blends of APes-Styrene blends were prepared by method reported in an earlier communication¹¹.

The C, H, N and S content of all the PEs (3a-c) and APes (4a-c) were estimated by means of Thermofinagan 1101 flash elemental analyzer (Italy). Their results are furnished in Table 1 and 2 respectively. From the results we can say that values of C, H, N and S of each PEs and APes were consistent with their predicted structures. The number average molecular weight of all the PEs and APes were estimated by non-aqueous conductometric titration following by method reported in an earlier communication¹⁰. Their results are furnished in Table-1 and 2 respectively. The IR spectra were recorded in Kerr pellets on a Nicollet 760 D spectrometer for both PEs and APes. The IR spectra of all PEs and APes were consistent with their predicted structures.

Number of hydroxyl groups present per repeating unit in PEs (3a-c) was also analyzed by employing acetylating method reported in an earlier communication¹⁰. Also, APes (4a-c) were characterized for the presence of double bonds per repeating unit employing mercury-catalyzed bromate-bromide method reported in an earlier communication¹⁰. Satisfactory results were found and the results are furnished in Table-1 and 2 respectively.

Curing of all these APes-Styrene blends (5a-c) were carried out on a differential scanning calorimeter (DSC) by using benzoyl peroxide as a catalyst. A Du Pont 900 DSC was used for this study. The data of DSC thermograms of all APes-Styrene blends (5a-c) are furnished in Table 3.

The unreinforced cured samples of APes-Styrene blends (5a-c) were also analyzed by thermo gravimetric analysis (TGA). The result reveals that the cured sample starts their degradation at about 150°C and their initial weight is about 2%. This small weight loss may be due to either in sufficient curing of components used or due to the catalyst used. A weight loss of about 10% is found at 300°C. However, the rate of decomposition increases very rapidly between 300°C to 450°C and reach up to 61% and the products are lost completely beyond 750°C. TGA data of all the cured samples are shown in Table 4.

The Glass fiber reinforced composites of all APes-Styrene blends (5a-c) were prepared based on their DSC data. The composites were characterized for their chemical resistance test their results are furnished in Table 5. The composites were also characterized for their mechanical and electrical tests. Their results are furnished in Table-6. The results shows that composites have good chemical resistant property, good mechanical and electrical strength.

CONCLUSIONS

From the characterizations of APes-Styrene blends the following conclusions have been made.

Rather than using novel APes the blends of APes-Styrene is more advantageous. The results furnished in Table 3 to 6 it self suggests that these blends give high curing temperature, slow degradation of product (i.e. low weight loss), good chemical resistance, good mechanical and good electrical strength. The results show that blends of APes-Styrene monomer can be competitor to commercial polyester resins.

ACKNOWLEDGEMENT

Thanks for giving research facilities by **DINESH ALLORGA LIMITED**, Research Department, At. Lunej, Ta. Khambhat, Dist. Anand. (Gujarat)

REFERENCES

1. V.Shukla, *Pigment & Resin Techno.* **35**, 353 (2006).
2. B. C. Samanta, T.Maity , S.Dalai , A. K. Banthia, *Pigment & Resin Techno.* **37**,3 (2008).
3. S.Ahmad , S. M..Ashraf, A.Hasant, S. Yadav, A. Jamal, *J. Appl. Poly. Sci.* **82**,1855 (2001).
4. V.Thulasiraman, S.Rakesh,M..Sarojadevi , *Polymer Compos.* **30**, 49 (2008).
5. M.Malik, V.Choudhary, I. K.Varma, *J. Macromol. Sci. Rev. Macromol Chem. Phys.* **C40**, (2000).
6. D.Patel and R.Patel,*Oriental J.Chem.*,**10**,158(1994)
7. Y.Bharambhe,D.Patel and R.Patel, *Prajna*,**31** (1993).
8. P. H.Parsania, P.P.Shah, K. C. Patel, and R.D. Patel,*J. Macromol. Sci.Chem.***22**,1485 (1985)
9. D.Limya and V. Bhav, *J.Ind.Chem.Soc.*,**8**,137(1931).

10. H. S. Patel, B. K. Patel, *Int. J. of Poly. Mater.* **58**, 312 (2009).
11. H. S. Patel, B. K. Patel, *J. of Reinforced Plast. and Compo.* (In Press)

Table-1 Characterization of PEs (3a-c)

PEAs	Elemental analysis (Wt %) Calc. / (Found)		No. of -OH group per repeating unit	Number average molecular weight ($\overline{M}_n$) $\pm$ 60
	%C	%H		
3a	70.12 (70.08)	6.49 (6.46)	1.94	3756
3b	70.12 (70.09)	6.49 (6.48)	1.96	3756
3c	70.47 (70.35)	6.66 (6.62)	1.94	3840

Table-2 Characterization of APEs (4a-c)


APEs Samples	Elemental analysis (Wt %) Calc. / (Found)		No. of double bonds per repeating unit	Number average molecular weight ($\overline{M}_n$) $\pm$ 60
	%C	%H		
4a	69.61 (69.56)	6.07 (6.03)	1.95	4404
4b	69.61 (69.58)	6.07 (5.97)	1.98	4404
4c	69.91 (69.87)	6.23 (6.16)	1.97	4488

Table-3 DSC curing of APEs-Styrene blends (5a-c)

APEs-Styrene blends	Curing Temperature ($^{\circ}$ C)		
	Ti	Tp	Tf
5a	108	136	155
5b	115	141	162
5c	117	148	169

Table-4 TGA of Unreinforced cured samples of APEs-Styrene blends (5a-c)

APEs-Styrene blends	% Weight loss at various temps. ($^{\circ}$ C) from TGA				
	150 $^{\circ}$ C	300 $^{\circ}$ C	450 $^{\circ}$ C	600 $^{\circ}$ C	750 $^{\circ}$ C
5a	1.84	9.85	61.13	76.56	80.29
5b	1.61	9.64	59.56	75.34	79.92
5c	1.42	9.60	56.83	71.12	78.54

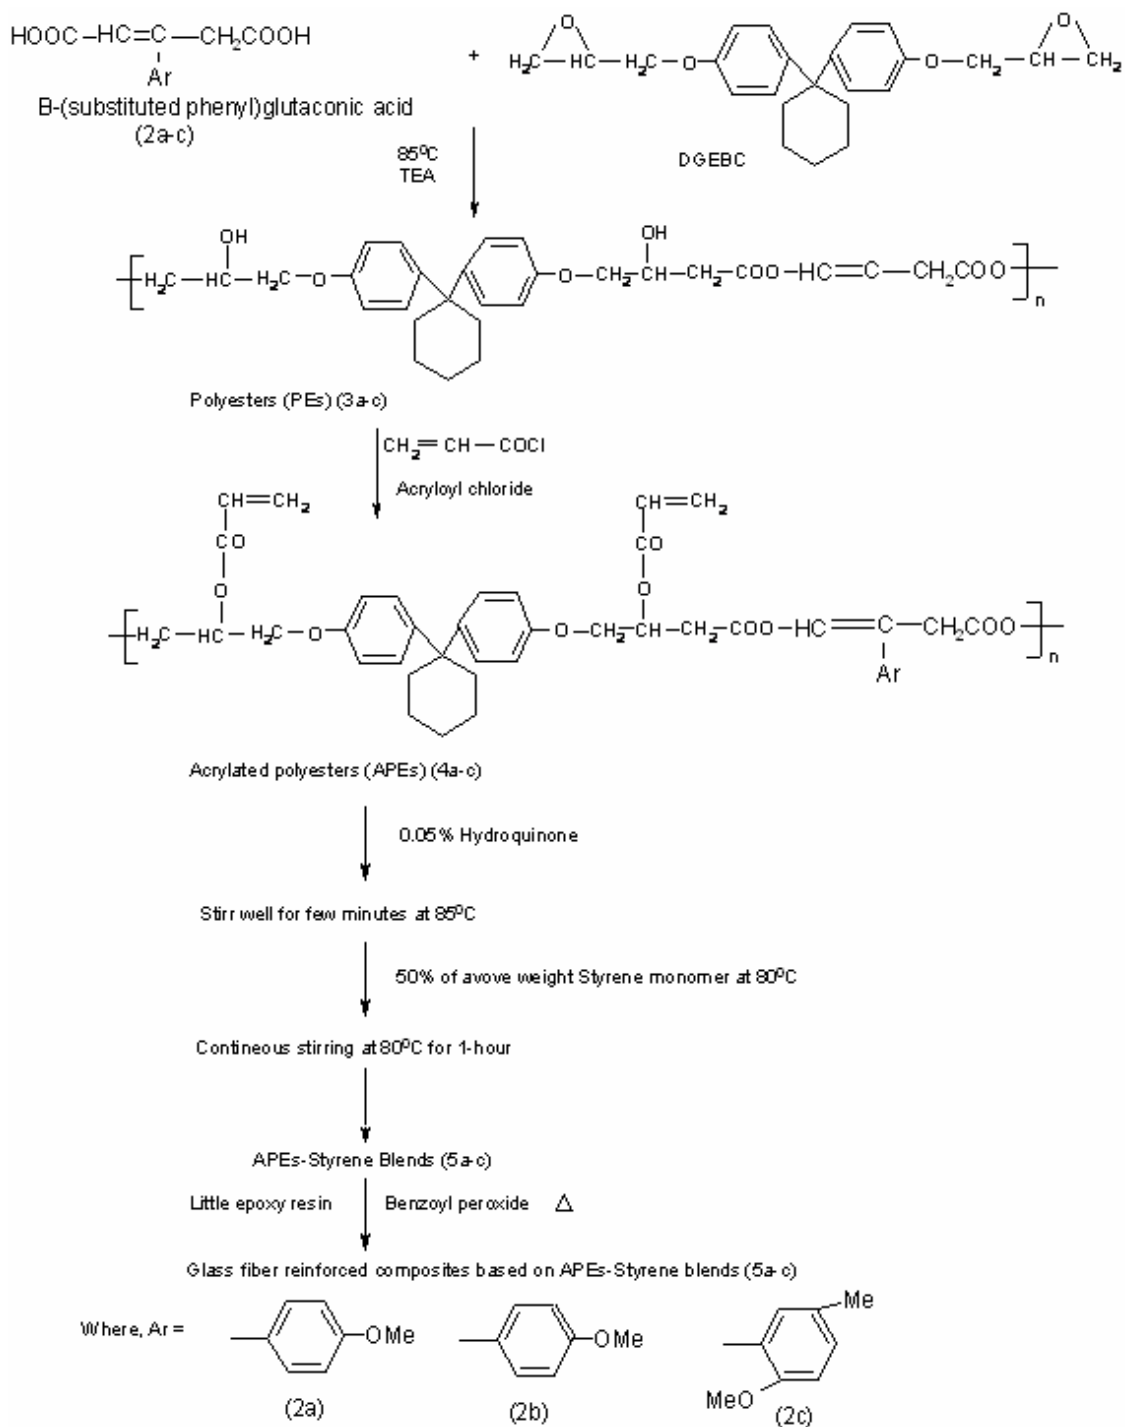

Scheme-1: Synthesis steps

Table-5 Chemical resistance properties of APEs-Styrene blends (5a-c)

Reagents	% Change in APEs-Styrene blends (5a-c)					
	5a		5b		5c	
	Thickness	Weight	Thickness	Weight	Thickness	Weight
H ₂ SO ₄	1.09	1.81	1.13	1.84	1.14	1.86
HCl	0.82	1.22	0.87	1.25	0.22	1.28
NaOH	0.71	1.09	0.78	1.14	0.81	1.17
Ethanol	0.20	0.32	0.26	0.37	0.27	0.39
Acetone	0.19	0.27	0.24	0.35	0.26	0.34
DMF	1.08	1.85	0.19	1.93	0.17	1.95
THF	0.51	0.75	0.62	0.79	0.62	0.83

Table-6 Mechanical and Electrical properties of APEs-Styrene blends (5a-c)

Composites of APEs-Styrene blends (5a-c)	Flexural Strength (MPa)	Impact Strength (MPa)	Compressive Strength (MPa)	Rockwell Hardness (R)	Electrical Strength in air (kV/mm)
5a	393	406	398	85	21.4
5b	395	410	393	84	21.6
5c	399	414	390	85	21.8

(Received: 1 January 2010

Accepted: 25 January 2010

RJC-508)

We proudly inform to all our Authors and Readers that, our journal...

RASĀYAN Journal of Chemistry

has been abstracted in

SCOPUS (Elsevier, the Netherlands) and SCIRUS (USA)

It has been already abstracted (right from its first issue) in the following abstracting agencies-

- AQUATIC SCIENCE AND FISHERIES ABSTRACTS (USA)
- CAB ABSTRACTS (UK)
- CHEMICAL ABSTRACTS (USA)
- CAPLUS (USA)
- CSA ILLUMINA NATURAL SCIENCES (USA)
- GLOBAL HEALTH (UK)
- INDIAN SCIENCE ABSTRACTS (INDIA)
- MEDICINAL AND AROMATIC PLANT ABSTRACTS (INDIA)
- METEOROLOGICAL AND GEOASTROPHYSICAL ABSTRACTS (USA)
- NANOTECHNOLOGY ABSTRACTS (USA)
- POLLUTION ABSTRACTS (USA)
- RUSSIAN PERIODICALS CATALOG
- ULRICH'S PERIODICALS DIRECTORY (USA)
- WATER RESOURCES ABSTRACTS (USA)